




# Cordless Angle Drill DA332D 10 mm (3/8") / DA333D 10 mm (3/8")

## Compact Angle Head Height & Center Height

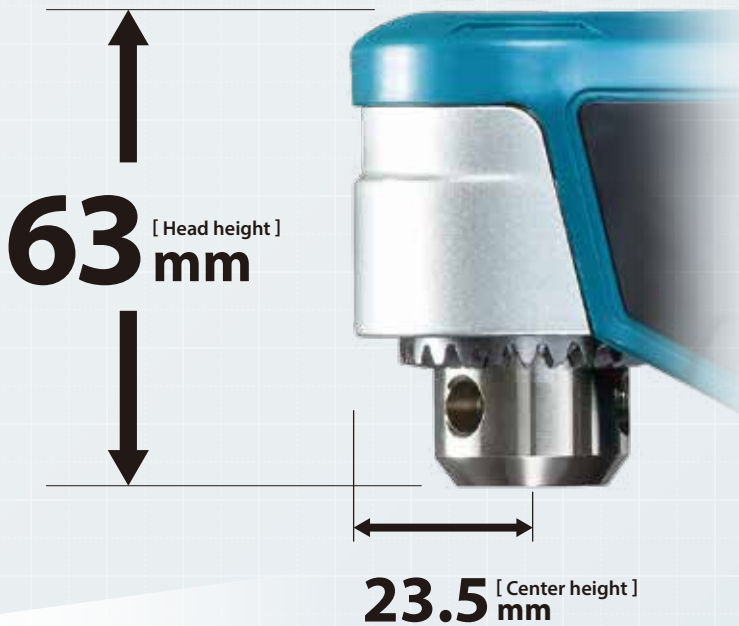

Fast drilling  
Up to **35%** \*

Drilled holes through a 30mm thick Lauan with ø9mm Auger bit.  
\* Comparison to Previous models.



Photo: DA332D



DA332D  
Keyed Drill Chuck



DA333D  
Keyless Drill Chuck



# Compact head height

shorter than previous models (DA332D : -3mm, DA333D : -4mm)

**DA332D**

Length **313mm**

Head height **63mm**

Center height **23.5mm**

**Easy-to-operate**  
push button type F/R change switch

**DA333D**


Head height **84mm**

Center height **23.5mm**


**LED job light with preglow and afterglow functions**

**Large switch lever convenient for tightening screws**

**On-tool chuck key storage**  
for fast & convenient bit changes (DA332D only)



## Comparison of work speed

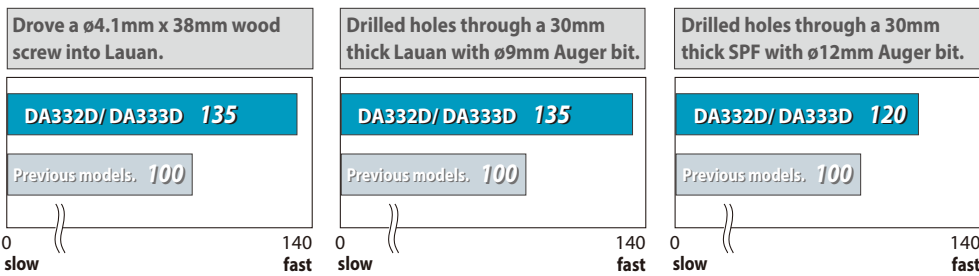

\*The test results depend to a great extent on the hardness of the material, etc.  
Numbers in the charts above are relative values when the capacities of Previous models is indexed at 100.



## Cordless Angle Drill

**DA332D 10 mm (3/8") / DA333D 10 mm (3/8")**

	DA332D	DA333D
Variable Speed	Steel: 10 mm (3/8") Wood: 12 mm (1/2")	Steel: 10 mm (3/8") Wood: 12 mm (1/2")
Brake	0 - 1,100	0 - 1,100
Keyless Chuck (DA333D only)	63 mm (2-1/2")	84 mm (3-5/16")
Reversing	23.5 mm (15/16")	23.5 mm (15/16")
Built-in Job Light	Drilling Into Metal: 2.5 m/s <sup>2</sup> or less	Drilling Into Metal: 3.0 m/s <sup>2</sup> or less
Carrying Case	70 dB(A) or less	70 dB(A) or less
	<b>Dimensions (L x W x H)</b> with BL1016/BL1021B: 313x68x86 mm (12-3/8"x2-11/16"x3-3/8") with BL1041B: 332x68x86 mm (13-1/8"x2-11/16"x3-3/8")	<b>Dimensions (L x W x H)</b> with BL1016/BL1021B: 313x68x95 mm (12-3/8"x2-11/16"x3-3/4") with BL1041B: 332x68x95 mm (13-1/8"x2-11/16"x3-3/4")
	<b>Net weight</b> 1.2 - 1.3 kg (2.6 - 2.9 lbs.)	<b>Net weight</b> 1.2 - 1.4 kg (2.7 - 3.0 lbs.)

Standard Equipment: Bit, Belt Clip, Battery, Charger **DA332 only** Chuck Key, Chuck Key Holder

	Charging Time	
	DC10SB	DC10WD
	22	50
	30	70
	60	130

Items of standard equipment and specifications may vary by country or area.  
The lightest and heaviest combination, according to EPTA-Procedure 01/2014.

# Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 201709