



# Cordless Pin Nailer

DPT353 18V LITHIUM-ION

PT354D 12Vmax LITHIUM-ION



**12V<sup>max</sup>**  
**LITHIUM-ION**

**CXT** PT354D



**18V**  
**LITHIUM-ION**

**LXT** DPT353

reaction  
**40%**  
Down  
compared to our predecessor model



## Low reaction force mechanism

prevent an incomplete nailing without pushing down the pin nailer tightly.



**DPT353**

Work volume on a single full battery charge  
 about **5,300** staple




**PT354D**


Work volume on a single full battery charge  
 about **1,000** staple

## Comfortable operation + Beautiful finish

### Counter Weight Mechanism

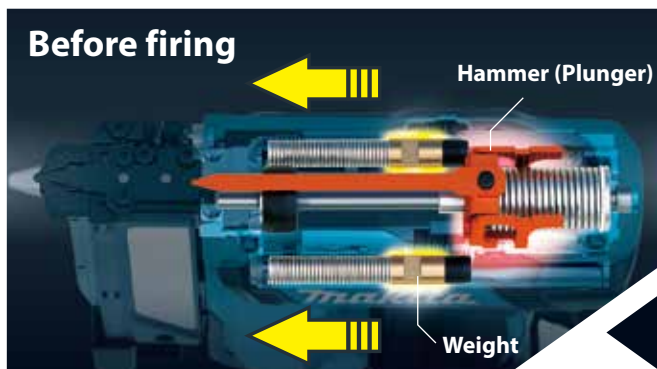


While hammer is pulled backward, weight moves forward.

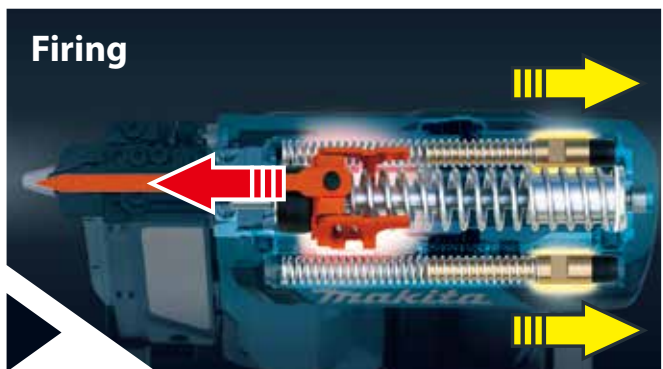

Hammer drives a pin nail into workpiece at a stroke and simultaneously weight moves backward. This unique mechanism reduces reaction at firing.



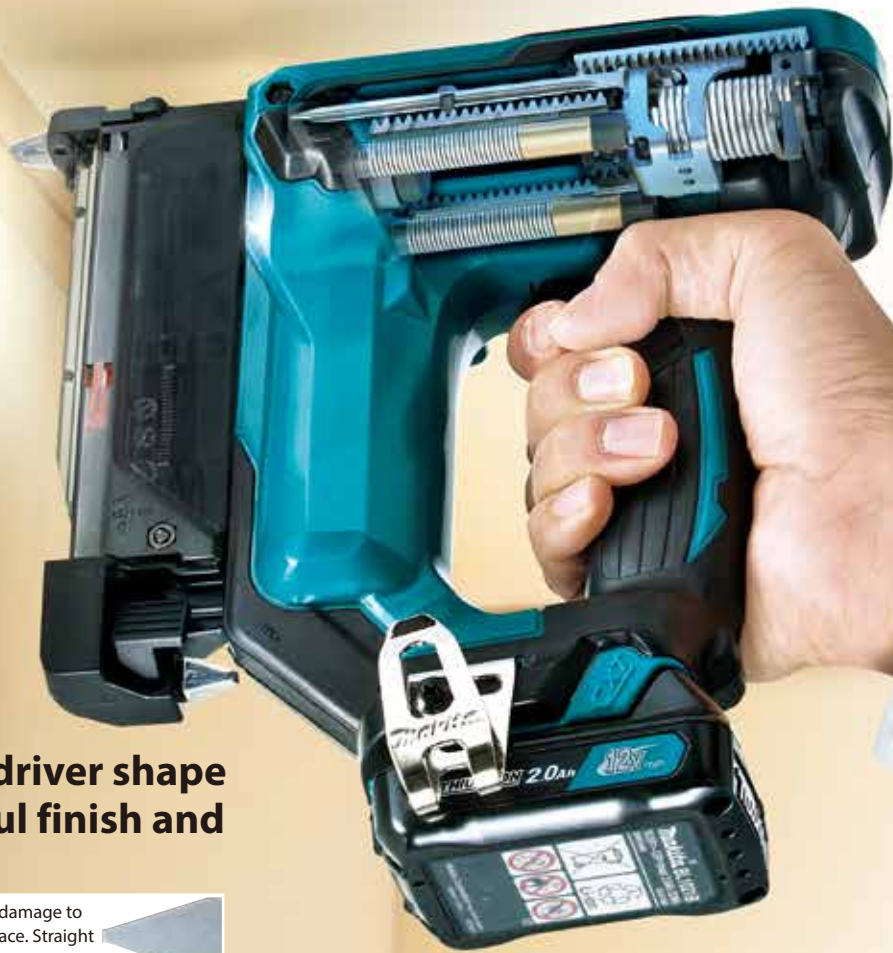

Newly designed driver shape balances beautiful finish and durability.

**0.6mm**

Reduced damage to work surface. Straight tip shape.



Photo : PT354D

**Nose tip designed to provide better visibility**

**Fires both vertically and horizontally**



Easy to exchange driver.



Nails can be fired in the groove of baseboard.



**Excellent corner firing**

Redesigned bolt position enables to fire at very close to the wall.



With Nose adapter



**2.5mm**

Pin nails

without Nose adapter



**1.5mm**

Pin nails



Photo : PT354D

# Optimum weight balance for easy handling



# Contact arm mechanism + Low reaction force mechanism



## LED job light

LED warning lamp for Battery capacity



## Battery fuel gauge

(DPT353 only)



## ■ Depth Adjustment

## ■ Anti-dry fire mechanism

## ■ Ergonomically designed grip

## Li-ion Battery & Charging Time Reference, Compatibility Chart

DPT353							PT354D			
	BL1815N 18V 1.5Ah	BL1820B 18V 2.0Ah with Battery fuel gauge	BL1830B 18V 3.0Ah with Battery fuel gauge	BL1840B 18V 4.0Ah with Battery fuel gauge	BL1850B 18V 5.0Ah with Battery fuel gauge	BL1860B 18V 6.0Ah with Battery fuel gauge		BL1016 12Vmax 1.5Ah	BL1021B 12Vmax 2.0Ah with Battery fuel gauge	BL1041B 12Vmax 4.0Ah with Battery fuel gauge
	<b>15 min</b>	<b>24 min</b>	<b>22 min</b>	<b>36 min</b>	<b>45 min</b>	<b>55 min</b>		<b>22 min</b>	<b>30 min</b>	<b>60 min</b>
	<b>30 min</b>	<b>45 min</b>	<b>60 min</b>	<b>90 min</b>	<b>110 min</b>	<b>130 min</b>		<b>50 min</b>	<b>70 min</b>	<b>130 min</b>

## Cordless Pin Nailer DPT353, PT354D

- Depth Adjustment
- Auto Firing Stop
- Built-in Job Light
- Carrying Case

	DPT353	PT354D
<b>Capacity</b>	Length: 15, 18, 25, 30, 35 mm (5/8", 11/16", 1", 1-3/16", 1-3/8") Dia.: 0.6mm (1/32") Gauge: 23 Ga	Length: 15, 18, 25, 30, 35 mm (5/8", 11/16", 1", 1-3/16", 1-3/8") Dia.: 0.6mm (1/32") Gauge: 23 Ga
<b>Magazine Capacity</b>	120	120
<b>Vibration Level</b>	2.5 m/s <sup>2</sup> or less	2.5 m/s <sup>2</sup> or less
<b>Sound Pressure Level</b>	76 dB(A)	76 dB(A)
<b>Dimensions (L x W x H)</b>	257x79x226mm (10-1/8"x3-1/8"x8-7/8")	231x66x226mm (9-1/8"x2-5/8"x8-7/8")
<b>Net weight</b>	BL1815N : 2.0 kg (4.4 lbs.) BL1860B : 2.3 kg (5.1 lbs.)	BL1016 : 1.8 kg (4.0 lbs.) BL1041B : 2.0 kg (4.4 lbs.)

**Standard Equipment :** Nose Adapter, Safety Goggles, Belt Clip, Hex Wrench, Battery, Charger

*Items of standard equipment and specifications may vary by country or area. weight according to EPTA-Procedure 01/ver.2.1*

# Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 201704