

Satisfy Professional's Needs



**Rotary Hammer**  
**HR1841F / HR1840** 18 mm (11/16")



SDS-PLUS Shank

# Compact & Low vibration



# AVT

**ANTI VIBRATION TECHNOLOGY**

(HR1841F only)


photo : HR1841F

**Vibration value**

# 46% decrease


Compared to our current models

# Excellent drilling performance

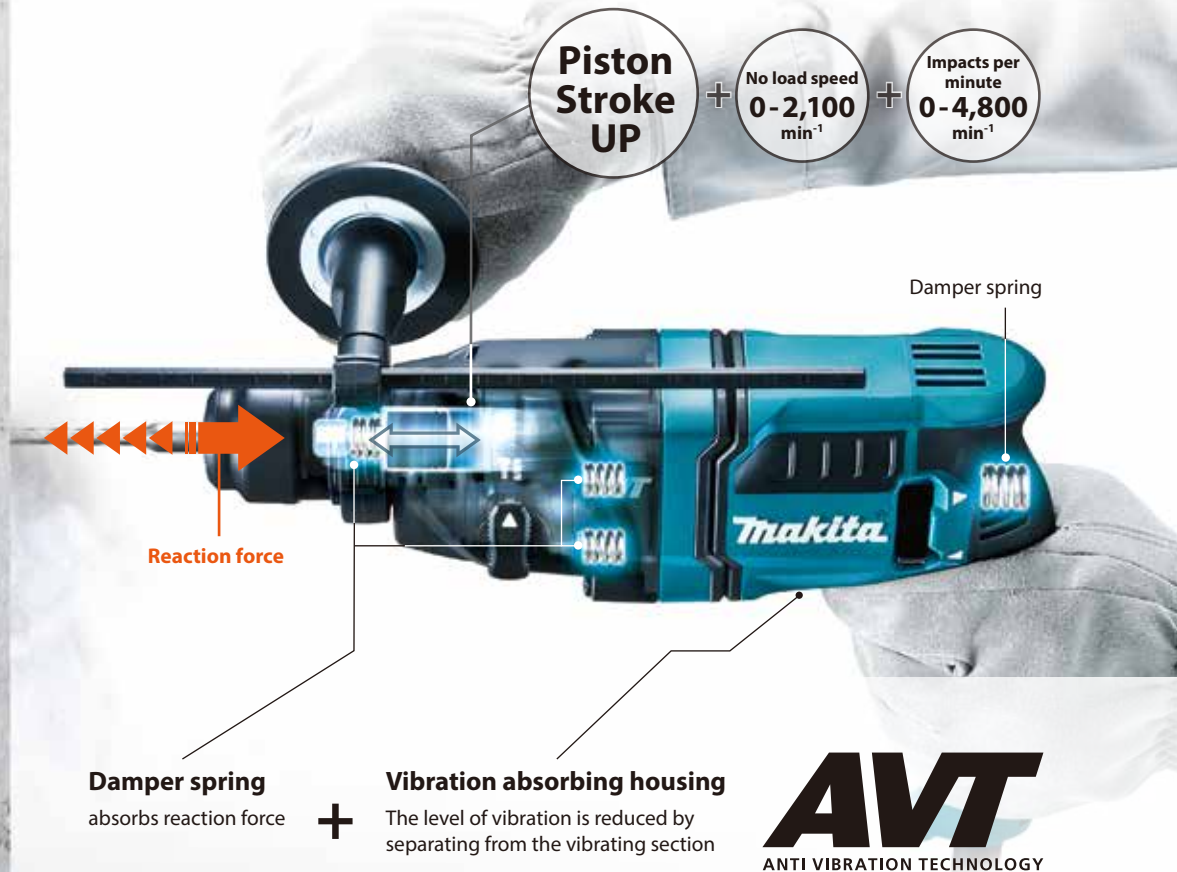

## Feature

2 operation modes



One-touch sliding chuck for easy bit change



LED job light (HR1841F only)



## Accessories

Dust cup  
Part.No : 198362-9



Grip base set  
Part.No : 194581-5



## Rotary Hammer

**HR1841F / HR1840** 18 mm (11/16") Adapted for SDS-PLUS bits

459

- Double Insulation
- Variable Speed
- Reversing
- SDS-PLUS Shank
- Torque Limiter
- Dust Collection
- Built-in Job Light (HR1841F only)
- Carrying Case

<b>Continuous rating input</b>	470W
<b>Impact Energy</b>	EPTA-Procedure 05/2009: HR1841F : 1.4 J, HR1840 : 1.6 J Our experimental conditions: 1.4 J
<b>Capacity</b>	Concrete: 18 mm (11/16") Core Bit: 35 mm (1-3/8") Diamond Core Bit (Dry Type): 65 mm (2-9/16") Steel: 13 mm (1/2") / Wood: 24 mm (15/16")
<b>Blows Per Minute (BPM)</b>	0 - 4,800
<b>No Load Speed (RPM)</b>	0 - 2,100
<b>Sound Pressure Level</b>	87 dB(A)
<b>Sound Power Level</b>	98 dB(A)
<b>Vibration Level</b>	HR1841F : Hammer Drilling Into Concrete: 7.5 m/s <sup>2</sup> HR1840 : Hammer Drilling Into Concrete: 10.0 m/s <sup>2</sup>
<b>Dimensions (L x W x H)</b>	285x75x208 mm (11-1/4"x3"x8-3/16")
<b>Net weight</b>	HR1841F : 2.0 - 2.5 kg (4.5 - 5.4 lbs.) HR1840 : 2.0 - 2.4 kg (4.3 - 5.3 lbs.)
<b>Power supply cord</b>	2.5 m (8.2 ft.)

**Standard Equipment :** Dust Cup (country-specific), Side Grip, Depth Gauge

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

## Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 201711