

**Product Image**





**Specification**

Lock size : 205x34x42(mm)(L\*W\*H)  
 Bracket size : 90x25(mm)(L\*W)  
 Latch size : 20mm  
 Input voltage : 12VDC

Working Current: dynamic currents $\leq$ 1.2A,  
 static current $\leq$ 0.2A  
 Signal Output: lock status  
 Door Type: wooden door, glass door,  
 metal door  
 Weight:0.75KG

**Cabling instructions**

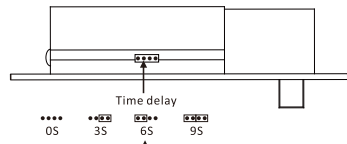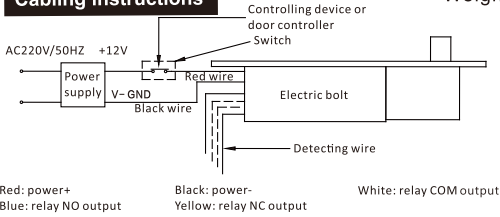


Remarks:  
 The delay adjustment jumper is: lock delay  
 The timing standard is: start timing after detecting the lock signal  
 (It can be adjusted to 3S, 6S according to usage requirements)


**Power Cable**

When the electric bolt lock is power off:  
 COM and NC are connected;  
 COM and NO are disconnected;  
 When the electric bolt lock is power on door open:  
 COM and NC are connected;  
 COM and NO are disconnected;  
 When the electric bolt lock is power on door close:  
 COM and NO are connected;  
 COM and NC are disconnected;  
 V+ connects with power 12VDC  
 V- connects with GND

**Wiring diagram**




**Drawing**

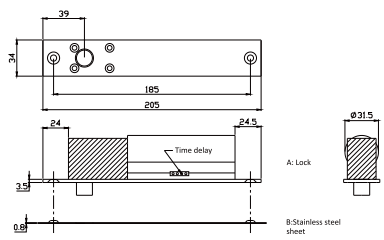

**Installation Illustration**



For standard door



For glass door without down-frame

- Please pay attention to the following items when installing and using:
1. It is forbidden to touch paint or volatile chemicals.
  2. If there is dust on the surface of the product, please wipe it off gently with a soft cloth. Avoid rubbing or collision with rough objects.
  3. When installing and using, if you have any questions, please call our factory.
  4. During the warranty period, please do not disassemble the internal components of the product by yourself. Once disassembled by yourself, the underwriting rights will automatically become invalid.





## 技术参数

锁体尺寸: 长205x宽34x厚42 (mm)

锁夹尺寸: 长90x宽25 (mm)

锁舌尺寸: 20mm

输入电压: 12VDC


工作电流: 启动电流 $\leq 1.2A$ , 工作电流 $\leq 0.2A$

信号输出: 锁状态侦测信号输出

使用门型: 木门、玻璃门、金属门

产品重量: 0.75KG

## 接线示意图

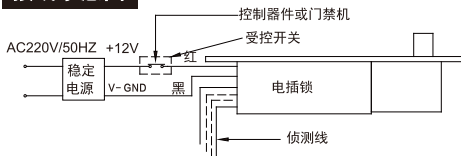


红色线: 电源+      黑色线: 电源-      白色线: (COM) 中性线  
蓝色线: 常开信号 (NO)      黄色线: 常闭信号 (NC)

## 接线说明

电插锁断电状态时: COM与NC通路;      V+ 接电源12VDC  
COM与NO断路;  
电插锁上电开门时: COM与NC通路;      V- 接GND  
COM与NO断路;  
电插锁上电关门时: COM与NO通路;  
COM与NC断路;


## 产品尺寸图

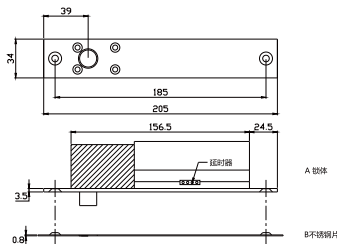

## 安装示意图



标准安装图




下无框玻璃门安装图



安装使用时请注意以下事项:

- 1、禁止接触油漆或有挥发性化学物品。
- 2、产品表面若有灰尘, 请用软布轻轻抹掉即可, 应避免与粗糙的物品摩擦或碰撞。
- 3、安装使用时, 若有疑问请拨打电话与我厂联系。
- 4、在保修期内, 请不要自行拆卸产品内部组件, 一经自行拆卸, 其承保权则自动失效。

## 接线示意图



## 接线示意图



产品质量合格证  
Qualification Card

PASS