

DS-TVL224

4-Lines 2-Color 8-Characters Outdoor Entrance & Exit LED Screen



- Placed in the entrance & exit of a parking lot, displays the information including available parking space, license plates, welcome greetings, time, etc.
- Displaying standard English characters, numeric characters, and even other foreign special characters
- Standard communication method is RJ45 - both online and offline modes are supported
- Control computer can dictate the content which is displayed

▪ Specification

Installation	
Maintenance Mode	Front
Display Screen	
Pixel Pitch	P4.75
Resolution	64*64
Display Content	GB2312 Character Set, 16*16 Lattice Chinese Characters
Screen Type	LED
Display Color	Red,Green,Yellow
Number of Module	2
Viewing Angle	120° (H) / 120° (V)
Display Mode	instant, left shift, up forward, etc.
Pixel Pitch Category	4.75
Color Temperature	3000k to 6000k
Brightness Uniformity	≥95%
Color Uniformity	≥95%
Contrast Ratio	2000 : 1
Luminance	3500cd/m ²
Scanning Mode	8S
Communication Mode	TCP
General	
Screen Border Material	Iron Frame Spraying Plastic (Dark armored glass for display part)
Working Temperature and Humidity	-30 to 60 °C 10% to 85% RH
Power Supply	AC110-240V,50/60Hz,max0.5A
Package Dimensions	470mm*615mm*200mm
Dimensions	355 × 495 × 80 mm (13.98 × 19.47 × 2.56 inch)
Weight	8 kg (17.64 lb.)
Weight (with Package)	9.6 kg (21.16 lb.)
Storage Temperature and Humidity	-40 to 70 °C 10% to 85% RH
Average Consumption	20W
Max. Consumption	70W
Lifespan	100000Hours
Approval	
Protection	IP54


▪ Available Model

DS-TVL224-4-5Y

DS-TVL224-8-5Y

DS-TVL224-4-5Y/J

▪ Dimension

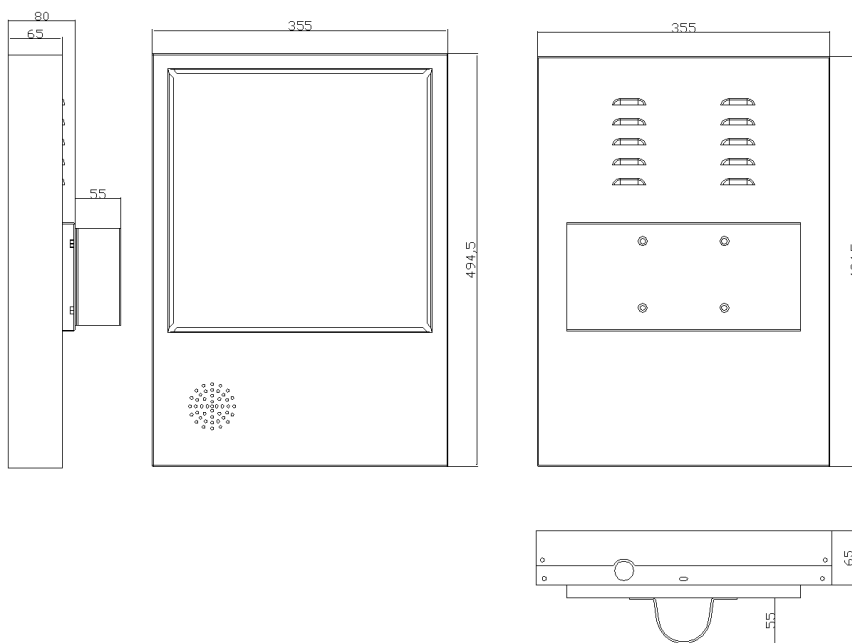

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

