



# Cordless Bar Light ML012G / DML818



**XGT**  
**40V L<sup>+</sup>ION**  
**max**

**18V**  
**LITHIUM-ION**



photo: ML012G



photo: ML012G



photo: DML818

Continuous use  
on a full battery charge

**ML012G**

High / Medium / Low

**4.5 / 9.5 / 20h**

Battery: BL4025 / F

**DML818**

High / Medium / Low

**4 / 9.5 / 19h**

Battery: BL1850B

**ML012G**



**DML818**



## Bar type light for wide area illumination

For wide area illumination, we use a long bar type light consisting of two LED light bars, each of which is covered with a light-diffusing plastic lens.



Max luminous flux  
**1,700 lm**  
with all 42 LEDs on

photo: ML012G

### Foldable

- LED light bar section can be folded in half, allowing for double-sided illumination when folded.
- Compact for transportation or storage




### Illuminating angle adjustment by rotating LED light bar

By rotating LED light bar clockwise maximum 90 degrees or counterclockwise maximum 180 degrees, user can adjust the illuminating angle to 7 angles.




### Telescopic hook

- Clip on each end of Telescopic hook holds the LED light bar section securely.
- Telescopic hook allows user to attach the appliance to the hood, back door and more of vehicles, making it ideal for use as a worklight in automotive workshops.

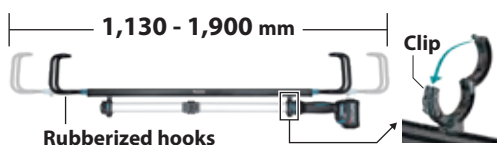

### Illuminating angle adjustment with Telescopic hook attached

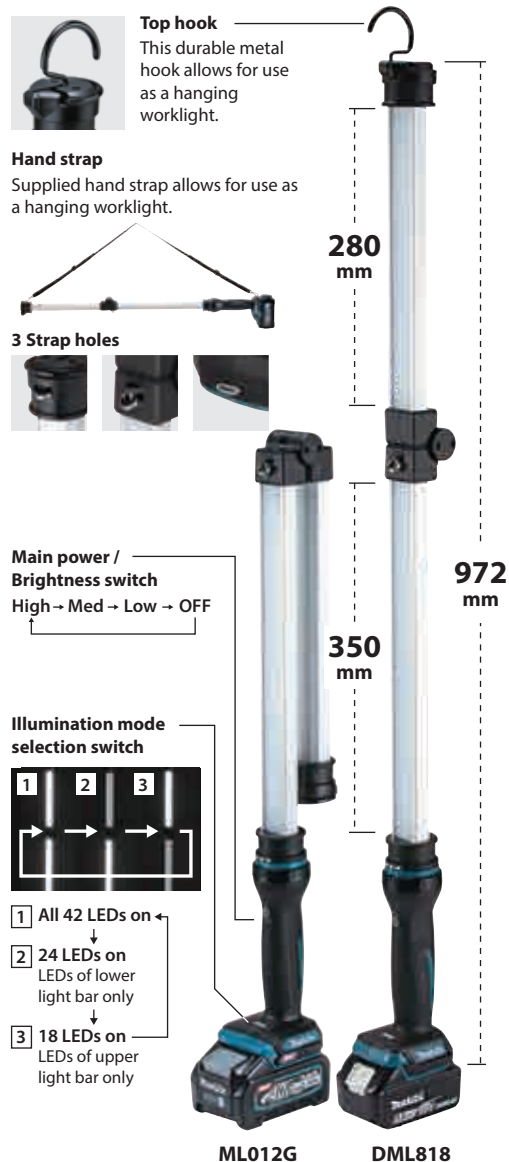

### Continuous use

Illuminating with both lower and upper LED light bars (with all 42 LEDs on)

Model No.	ML012G					DML818					
	40V max					18V					
Battery	BL4020	BL4025/F	BL4040/F	BL4050F	BL4080F	BL1815N	BL1820B	BL1830B	BL1840B	BL1850B	BL1860B
Brightness setting											
High (1,700 lm)	3.5 h	4.5 h	7.0 h	8.5 h	14 h	1.3 h	1.7 h	2.4 h	3.0 h	4.0 h	5.0 h
Medium (800 lm)	7.5 h	9.5 h	15 h	19 h	31 h	2.8 h	3.5 h	5.0 h	7.0 h	9.5 h	11 h
Low (400 lm)	16 h	20 h	32 h	40 h	65 h	5.5 h	7.5 h	10 h	15 h	19 h	23 h

## Charging Time

Model No.	40V max		18V		
	DC40RA	DC40RC	DC18RC	DC18SD	
BL4020 2.0Ah	22 min	30 min	BL1815N 1.5Ah	15 min	30 min
BL4025/F 2.5Ah	28 min	38 min	BL1820B 2.0Ah	24 min	45 min
BL4040/F 4.0Ah	45 min	67 min	BL1830B 3.0Ah	22 min	60 min
BL4050F 5.0Ah	50 min	85 min	BL1840B 4.0Ah	36 min	90 min
BL4080F 8.0Ah	76 min	170 min	BL1850B 5.0Ah	45 min	110 min
			BL1860B 6.0Ah	55 min	130 min

## Cordless Bar Light

### ML012G / DML818

Color temperature	Daylight white: 5,000 K
Luminous flux	High / Med. / Low: 1,700 / 800 / 400 lm
Illuminance	at 0.5m from the light source, with all 42 LEDs on: High / Med. / Low: 2,000 / 1,000 / 450 lx
Continuous use	ML012G: w/ BL4040, High / Med. / Low: 7 / 15 / 32 hours DML818: w/ BL1860B, High / Med. / Low: 5 / 11 / 23 hours
Dimensions (L x W x H)	ML012G: w/o Battery: 972 x 85 x 100 mm (38-1/4 x 3-3/8 x 3-15/16") DML818: w/o Battery: 972 x 80 x 101 mm (38-1/4 x 3-1/8 x 4")
Mounting width of Telescopic hook	1,130 - 1,900 mm (44-1/2 - 74-3/4")
Net weight	ML012G: w/o Battery: 1.1 kg (2.4 lbs.) DML818: w/o Battery: 1.1 kg (2.4 lbs.)

Standard Equipment: Telescopic hook, Hand strap

not covered by EPTA-Procedure  
Items of standard equipment and specifications may vary by country or area.

**Makita Corporation**

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202401